


Typical FD30 Glazed Fire Screen Section

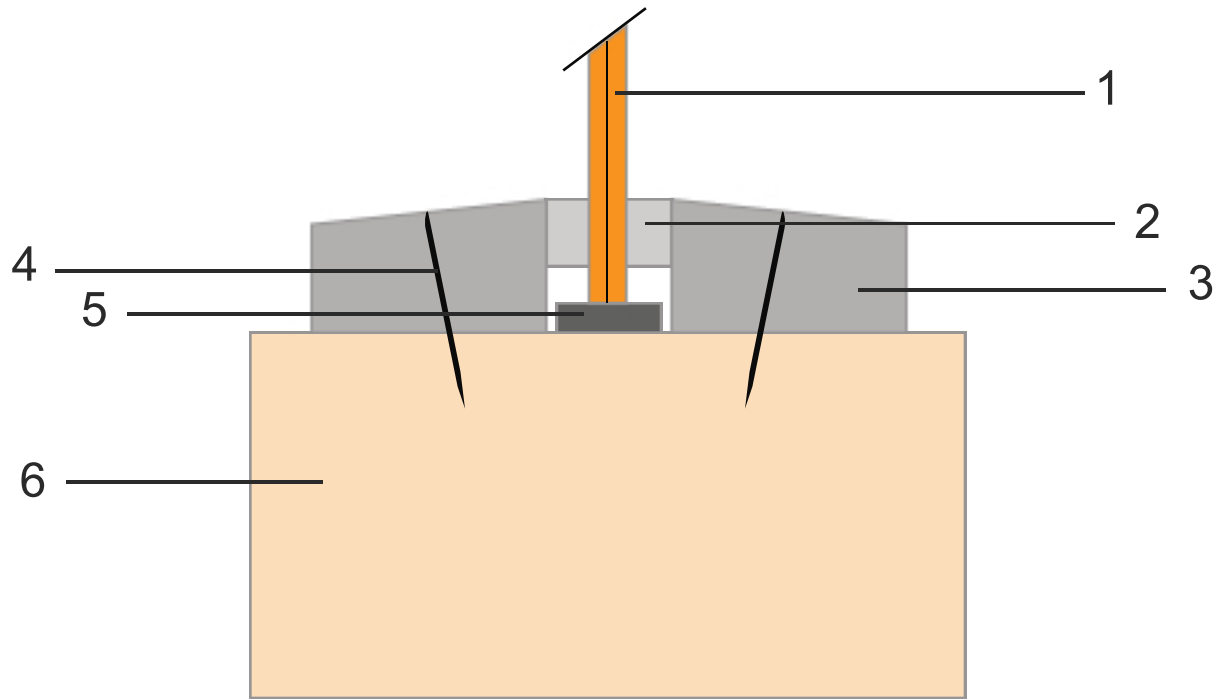

1. Pyroguard 7mm Clear or Wired
2. 20mm by 3mm CGI 'K tape' ceramic fibre glazing tape
3. 25mm high by 40mm wide square or chamfered (up to 30°) hardwood glazing beads, minimum density 650 kg/m³
4. 50mm long M4 steel screws at 200mm centres (30° to glass)
5. Hardwood or non-combustible setting blocks
6. 92mm by 45mm (minimum) softwood framing sections, minimum density 450 kg/m³